



6" x 6" #6 CONC. FILLED BOLLARDS AT 3' O.C. (3' HIGH, 3' BURIED BELOW GROUND). SEE DETAIL ST-38A

**SECTION A**  
BOLLARD CONFIGURATION



**NOTES:**


1. SINGLE ENCLOSURE IS 12' WIDE (INTERIOR)
2. THE EXTERIOR FINISH AND COLOR OF THE ENCLOSURE SHALL MATCH THE BUILDING PER THE DESIGN REVIEW PERMIT EXHIBITS AND/OR CONDITIONS OF APPROVAL
3. GREASE/TALLOW BIN ENCLOSURE MAY BE ATTACHED TO THE TRASH ENCLOSURE OR BE CONSTRUCTED SEPARATELY. THE GREASE/TALLOW BIN MUST NOT BE LOCATED WITHIN THE TRASH/RECYCLING ENCLOSURE.
4. NO. 4 REBAR, 12 INCHES O.C. EACH WAY, 3 INCH DOBIES WITH WIRE TIES AT 3' INTERVALS, EACH WAY.



**BOLLARD GATE**  
**DETAIL**

*Richard D. Samuelson*


RICHARD PLECKER  
ENVIRONMENTAL UTILITIES DIRECTOR

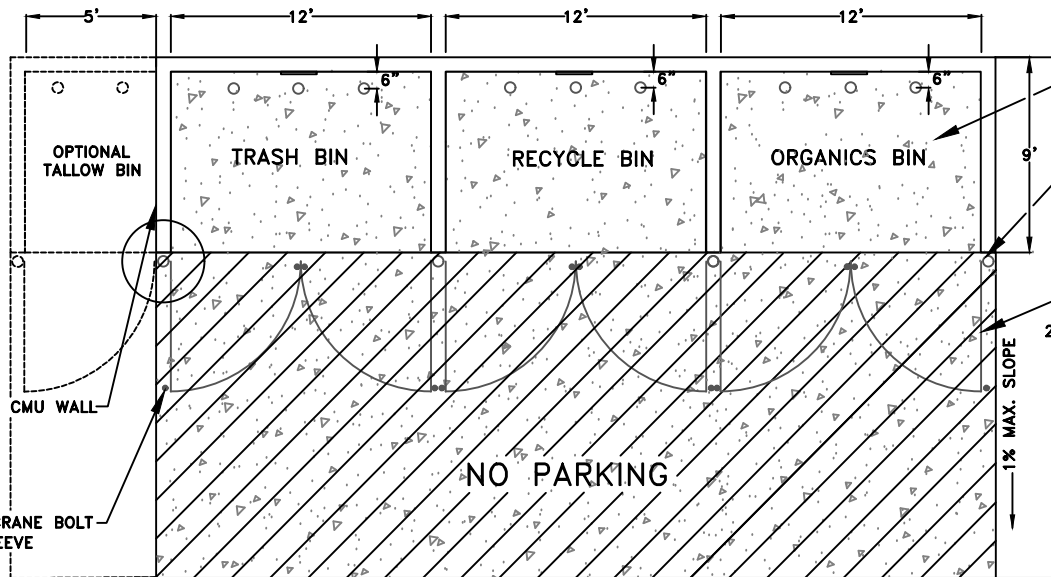

**PLAN**



	ENVIRONMENTAL UTILITIES DEPARTMENT
	<b>STANDARD TRASH ENCLOSURE</b>
SCALE: NONE	SW-1
REVISED: JANUARY 2020	
DRAWN BY: D. SAMUELSON	
APPROVED BY: RICHARD PLECKER	

REINFORCED CONCRETE APPROACH AND INTERIOR SHALL BE 6" THICK MIN. PAINTED "NO PARKING" 12" LETTERS WITH 4" DIAGONAL LINES

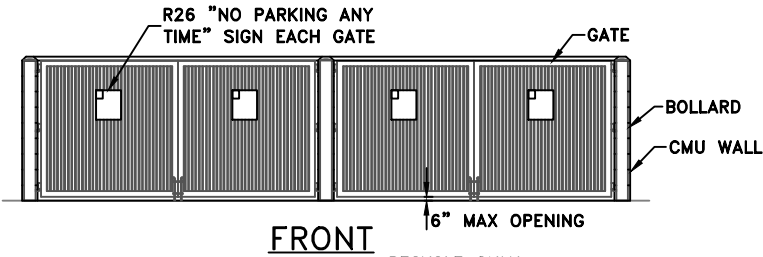


**NOTES:**

1. SINGLE ENCLOSURE IS 12' WIDE (INTERIOR)
2. THE EXTERIOR FINISH AND COLOR OF THE ENCLOSURE SHALL MATCH THE BUILDING PER THE DESIGN REVIEW PERMIT EXHIBITS AND/OR CONDITIONS OF APPROVAL
3. GREASE/TALLOW BIN ENCLOSURE MAY BE ATTACHED TO THE TRASH ENCLOSURE OR BE CONSTRUCTED SEPARATELY. THE GREASE/TALLOW BIN MUST NOT BE LOCATED WITHIN THE TRASH/RECYCLING ENCLOSURE.

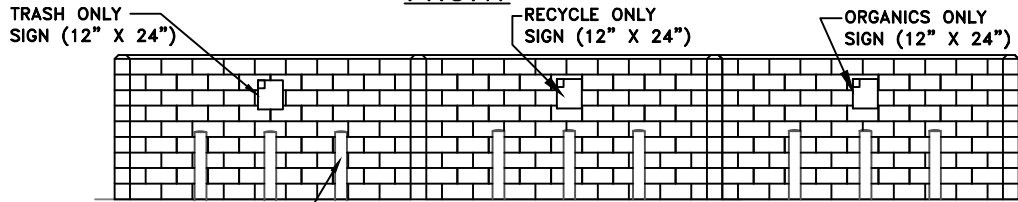


6' x 6"Ø CONC. FILLED BOLLARDS AT 3' O.C. (3' HIGH, 3' BURIED BELOW GROUND). SEE DETAIL ST-38A

**SECTION A**  
BOLLARD CONFIGURATION



**BOLLARD GATE**  
DETAIL

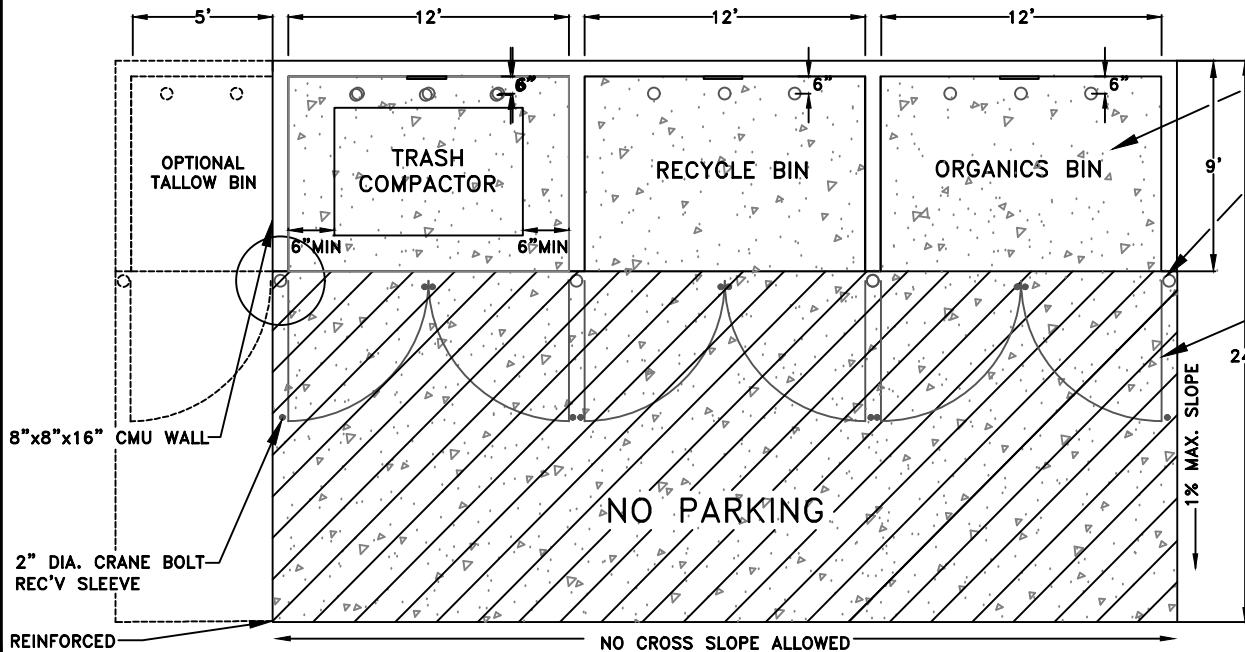

**PLAN**

REINFORCED CONCRETE APPROACH AND INTERIOR SHALL BE 6" THICK MIN. PAINTED "NO PARKING" 12" LETTERS WITH 4" DIAGONAL LINES


*Richard D. Plecker*  
RICHARD PLECKER  
ENVIRONMENTAL UTILITIES DIRECTOR




ENVIRONMENTAL UTILITIES  
DEPARTMENT

**FRONT LOADING  
COMPACTOR ENCLOSURE**

SCALE: NONE  
REVISED: JANUARY 2020  
DRAWN BY: R. VAN NESS  
APPROVED BY: RICHARD PLECKER

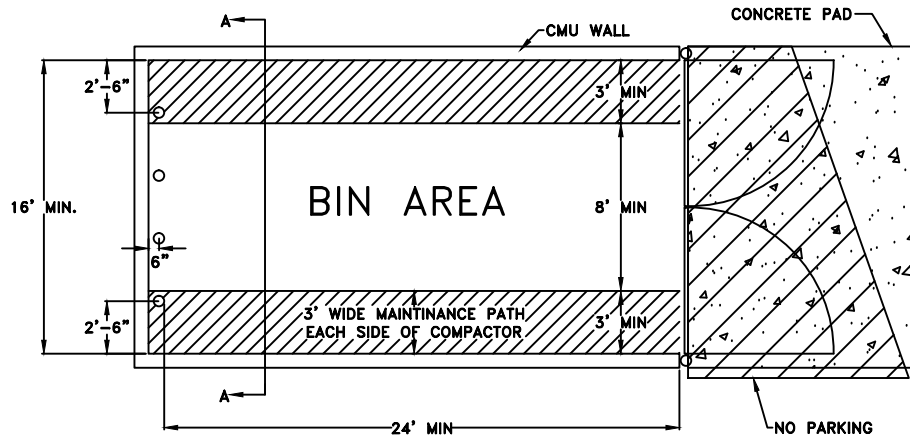


**PLAN**  
COMPACTOR BIN

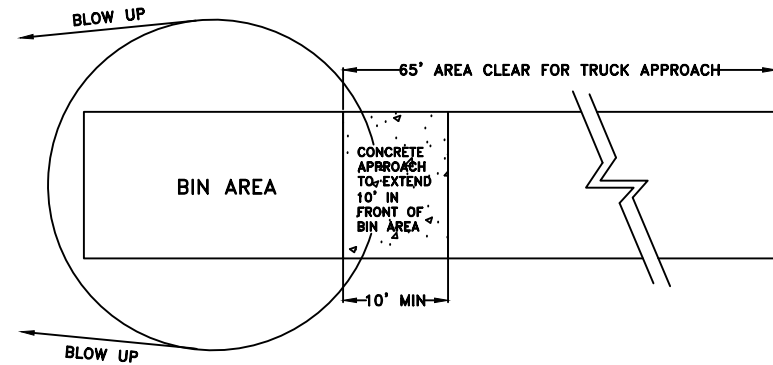


**PLAN**  
BIN & APPROACH

**NOTES:**

1. APPROACH SHALL BE 6" THICK REINFORCED CONCRETE SLAB ON GRADE. IT SHALL BE PAINTED "NO PARKING" IN 12" LETTERS AND STRIPED WITH 4" DIAGONAL LINES.
2. THE EXTERIOR FINISH AND COLOR OF THE ENCLOSURE SHALL MATCH THE BUILDING PER THE DESIGN REVIEW PERMIT EXHIBITS AND/OR CONDITIONS OF APPROVAL

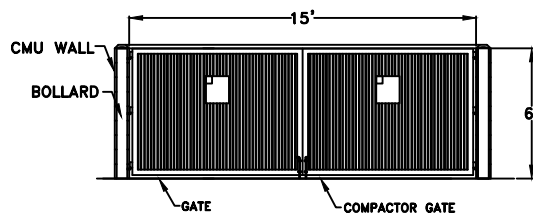

**FRONT**

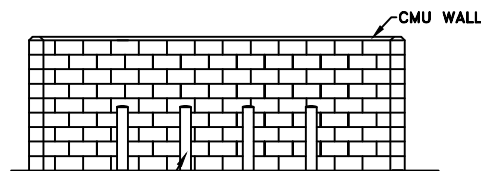

6' x 6" CONC. FILLED  
BOLLARDS AT 3' O.C.  
(3' HIGH, 3' BURIED  
BELOW GROUND)

**SECTION A**  
BOLLARD CONFIGURATION

**ELEVATIONS**

*Richard D. Plecker*

RICHARD PLECKER  
ENVIRONMENTAL UTILITIES DIRECTOR




ENVIRONMENTAL UTILITIES  
DEPARTMENT

**COMMERCIAL  
COMPACTOR ENCLOSURE**

SCALE: NONE  
REVISED: JANUARY 2016  
DRAWN BY: R. VAN NESS  
APPROVED BY: RICHARD PLECKER


SW-3

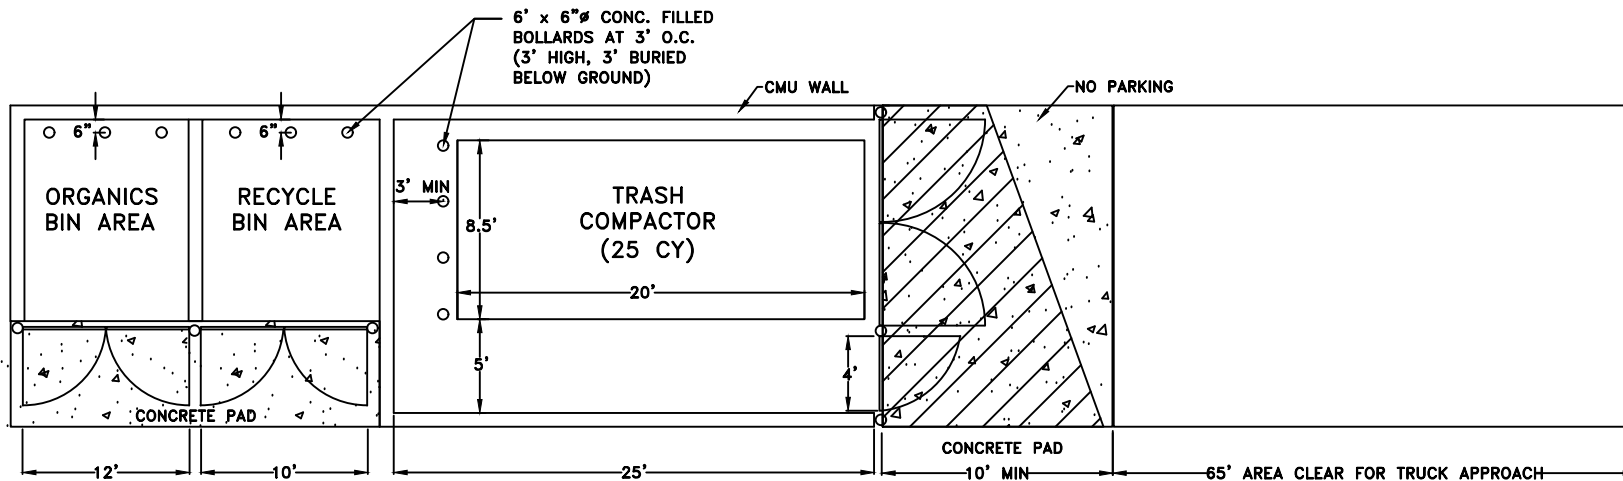

**PLAN**  
COMPACTOR BIN

**NOTES:**


1. APPROACH SHALL BE 6" THICK REINFORCED CONCRETE SLAB ON GRADE. IT SHALL BE PAINTED "NO PARKING" IN 12" LETTERS AND STRIPED WITH 4" DIAGONAL LINES.
2. THE EXTERIOR FINISH AND COLOR OF THE ENCLOSURE SHALL MATCH THE BUILDING PER THE DESIGN REVIEW PERMIT EXHIBITS AND/OR CONDITIONS OF APPROVAL
3. IF GREASE/TALLOW BIN IS REQUIRED, SEE SW-1 AND SW-2 FOR DETAILS

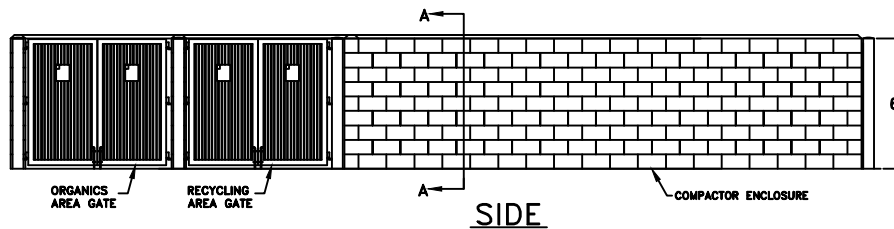


**SIDE**

*Richard D. Plecker*

RICHARD PLECKER  
ENVIRONMENTAL UTILITIES DIRECTOR

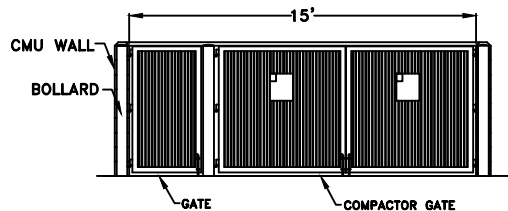

**FRONT**

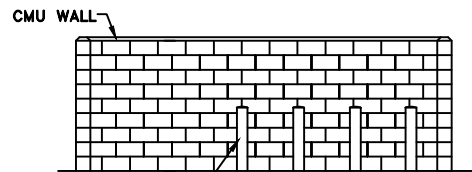

6" x 6" Ø CONC. FILLED  
BOLLARDS AT 3' O.C.  
(3' HIGH, 3' BURIED  
BELOW GROUND)

**SECTION A**  
BOLLARD CONFIGURATION  
(TRASH COMPACTOR)



ENVIRONMENTAL UTILITIES  
DEPARTMENT

**RESIDENTIAL/COMMERCIAL  
COMPACTOR ENCLOSURE**

SCALE: NONE  
REVISED: JANUARY 2020  
DRAWN BY: D.SAMUELSON  
APPROVED BY: RICHARD PLECKER

SW-4