



PARKS, RECREATION, & LIBRARIES
DEPARTMENT

PK-30

### ASPHALT CONCRETE PAVING

SCALE: NONE


REVISED: AUGUST 2011

DRAWN BY: R. CANLAS

APPROVED BY: D. CASEY

#### NOTES

- I. HEADER BOARD SHALL BE REDWOOD, ROUGH, CONSTRUCTION HEART GRADE, IN ACCORDANCE TO CALIFORNIA REDWOOD ASSOCIATION GRADING RULES.
- 2. ALL NAILS SHALL BE GALVANIZED 16 PENNY.
- 3. TYPE A ASPHALT CONCRETE REQUIRED.

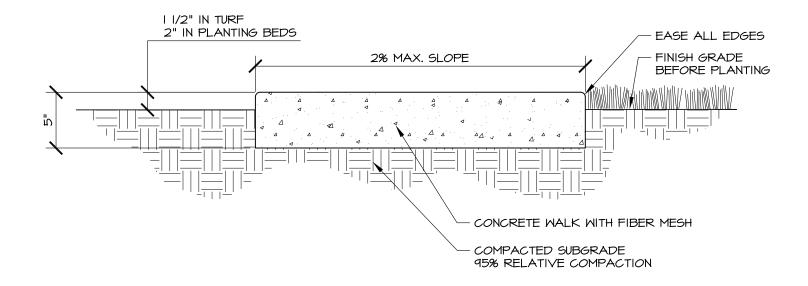



PARKS, RECREATION, & LIBRARIES
DEPARTMENT


# CONCRETE PAVING

 CLASS "A" SIX SACK CONCRETE.
 MEDIUM BROOM FINISH PERPENDICULAR TO PATH OF TRAVEL UNLESS OTHERWISE SPECIFIED.

I. PROVIDE SCORE PLANE JOINTS I" DEEP AT INTERVALS THE WIDTH OF THE WALK.

NOTES

SCALE: NONE
REVISED: AUGUST 2011
DRAWN BY: R. CANLAS
APPROVED BY: D. CASEY

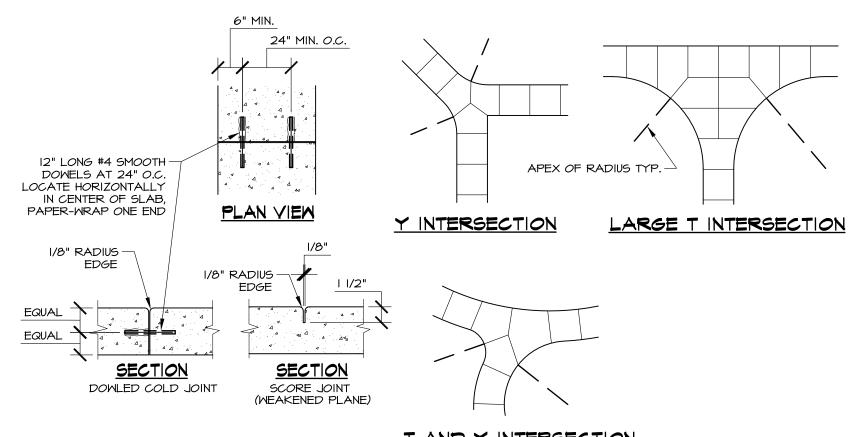

T AND Y INTERSECTION

DOMINICK CASEY, CPRP
PARKS, RECREATION & LIBRARIES DIRECTOR



PARKS, RECREATION, & LIBRARIES
DEPARTMENT


# CONTROL JOINTS

NOTES

I. CONTROL JOINTS SHALL NOT DIVIDE CONCRETE INTO SHAPES CONTAINING AN INTERIOR ANGLE OF 45 DEGREES OR LESS.

2. JOINTS SHALL BE SPACED EQUAL TO THE WIDTH OF THE PATH, EXAMPLE: A IO FT. WIDE PATH SHALL HAVE JOINTS SPACED AT IO FT. O.C.

SCALE: NONE
REVISED: AUGUST 2011
DRAWN BY: R. CANLAS
APPROVED BY: D. CASEY

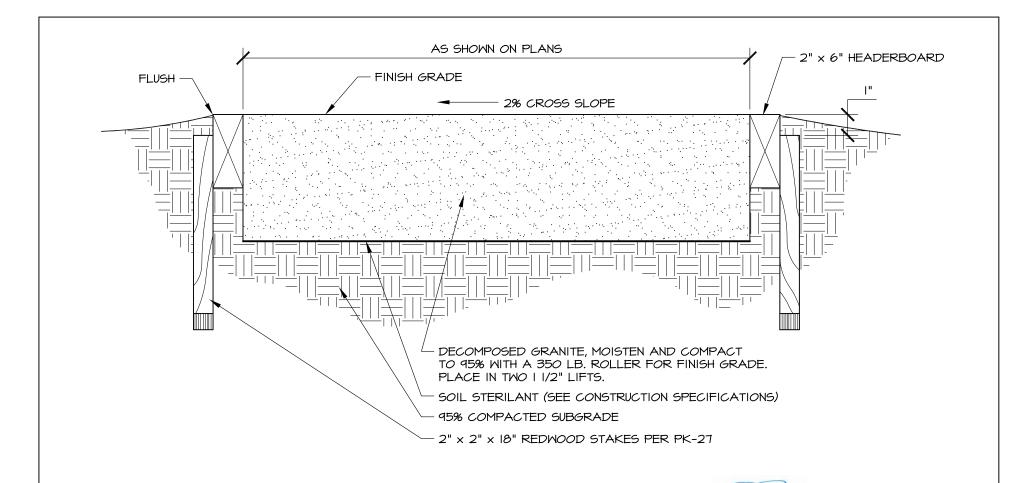



PARKS, RECREATION, & LIBRARIES
DEPARTMENT

### DECOMPOSED GRANITE PAVING

#### <u>NOTES</u>


I. CONTRACTOR TO SUBMIT SAMPLE OF LIGHT TAN OR CALIFORNIA GOLD DECOMPOSED GRANITE FOR APPROVAL BY CITY.

SCALE: NONE

REVISED: AUGUST 2011

DRAWN BY: R. CANLAS

APPROVED BY: D. CASEY

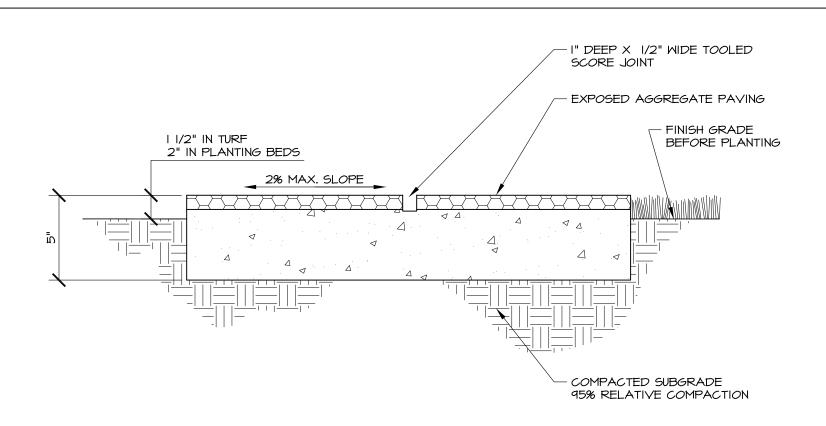



PARKS, RECREATION, & LIBRARIES
DEPARTMENT

# EXPOSED AGGREGATE PAVING

#### <u>NOTES</u>

- I. REFER TO SPECIFICATIONS FOR AGGREGATE TYPE, SIZE AND FINISH.
- 2. REFER TO PLANS FOR LOCATION OF SCORE JOINTS.

SCALE: NONE

REVISED: AUGUST 2011

DRAWN BY: R. CANLAS

APPROVED BY: D. CASEY